

AD-649246

AFFDL-TR-66-132

20070917070

THERMAL TESTING OF EXPANDABLE SOLAR COLLECTORS

ALLAN W. GUNDERSON

TECHNICAL REPORT AFFDL-TR-66-132

DECEMBER 1966

Distribution of this document is unlimited.

AIR FORCE FLIGHT DYNAMICS LABORATORY
RESEARCH AND TECHNOLOGY DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO

Best Available Copy

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Copies of this report should not be returned to the Research and Technology Division unless return is required by security considerations, contractual obligations, or notice on a specific document.

THERMAL TESTING OF EXPANDABLE SOLAR COLLECTORS

ALLAN W. GUNDERSON


Distribution of this document is unlimited.

Best Available Copy

FOREWORD

This report was prepared by the Structures Test Branch, Structures Division, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio, as a formal record of the testing of expandable solar collectors as part of Task No. 817004. The test program at the Structures Test Branch was directed by Allan W. Gunderson as project engineer, and Charles R. Waitz as instrumentation engineer. This report covers tests conducted between April 1964 and June 1965. Manuscript released by the author August 1966 for publication as a R T D Technical Report.

This technical report has been reviewed and is approved.



SANFORD LUSTIG
Acting Chief
Structures Test Branch
Structures Division

ABSTRACT

The Solar Collector Test Program was initiated to determine the structural response of expandable and unfurlable solar collectors to a simulated space thermal environment. The heating of the collectors was by T-3 infrared heat lamps, and cooling was obtained by liquid nitrogen boil-off. The collector structures in both instances performed as expected and no unusual deflections were measured.

TABLE OF CONTENTS

SECTION	PAGE
I INTRODUCTION	1
II TEST DEVELOPMENT	1
III TEST SET-UP	2
IV TEST CONDITIONS	2
V TEST RESULTS	3
VI CONCLUSIONS	3

ILLUSTRATIONS

FIGURE		PAGE
1.	20-Foot Solar Petal as Received	4
2.	20-Foot Solar Petal Mounted in Aluminum Enclosure	5
3.	20-Foot Solar Petal Showing Heat Lamps, Spray Cooling Tubes and Dead Weight Supports	6
4.	Close-up of Back Face of 20-Foot Solar Petal Showing Typical Thermocouple Mounting	7
5.	Control and Data Block Diagram	8
6.	20-Foot Solar Collector Petal Instrumentation Locations All Test Conditions	9
7.	Time-Temperature Profile Adapted to Solar Collector Tests	10
8.	Program Temperature versus Data Readout Temperature During 90-Minute Program	11
9.	Deflection Changes from Maximum Temperature to Minimum Temperature	12
10.	Thermocouple Plots Showing Temperature and Response Lag on Rapid Cycles	13
11.	28-inch Viron Solar Collector Mounted in Test Enclosure	14
12.	28-inch Viron Solar Collector with Heat Lamps and Spray Cooling Nozzles Mounted	15
13.	28-inch Viron Test Set-up Showing Liquid Nitrogen DeWar and Conoflow Control Valve	16
14.	28-inch Viron Solar Collector Instrumentation Locations	17
15.	Deflection Changes Between Maximum and Minimum Temperatures	18

SECTION I

INTRODUCTION

The Air Force Flight Dynamics Laboratory was requested to run thermal and load simulation tests on various expandable structures furnished by the Aero Propulsion Laboratory, Support Techniques Branch. This report covers thermal testing on two solar collector models during the period of April 1964 through June 1965.

The first test article was a 20-foot long solar collector petal as shown in Figure 1. This was one segment of a 45-foot diameter unfurlable collector. The manufacturer was Electro-Optical Systems, Incorporated of Pasadena, California. The pedal was made entirely of electro-deposited nickel. The front face surface was deposited on a parabolic mandrel. A styrofoam core, shaped like the back face, was then attached to the front face. Coating the styrofoam with a conductive paint made it possible to deposit

the back face directly to the core. The styrofoam core was then dissolved by a trichloroethylene bath. Total weight of the test petal was approximately 62 pounds.

The second collector was a 28-inch diameter urethane rigidized model made by Geophysics Corporation of America (GCA), Viron Division (see Figure 11). This collector was fabricated from gores of a two-layer drop-thread cloth sewn into a parabolic shape. The reflective surface was aluminized mylar adhered to the front face. The collector was then formed and rigidized over a parabolic mandrel.

The thermal cycling on the collectors was to simulate a near earth orbit of 90-minute duration. Heating of the collector occurs when it is in direct sunlight and cooling when in the earth's shadow.

SECTION II

TEST DEVELOPMENT

As part of the solar collector test requirements, it was necessary to develop a controlled cooling system which could work in combination with the present elevated temperature heating system. A series of compatibility and development tests were required to obtain a workable system. A number of Conoflow Model 73N12FC control valves were acquired as surplus material from a dismantled wind tunnel to control the required flow. Valve action was by an electric signal controlling a pneumatic actuator. The valves were first checked to determine if they could operate at the temperature of the liquid nitrogen. The valves were connected to the output line of a pressurized liquid nitrogen Dewar and were actuated with liquid nitrogen flowing through them. The valves proved satisfactory from this standpoint so a method of control was next investigated.

The original control mechanism with the valves was for a set point (constant temperature) control. This was not readily adaptable to a programmed (variable temperature) input. A control method was obtained by using a Research, Incorporated, Model 4080 heat controller output through a DC amplifier and then to the control valve. This method used the 4080 output in reverse of normal - calling for control when the thermocouple was too warm instead of too cold as on the heating mode.

A test panel was fabricated for system checkout before using the actual test article. Cooling coverages and rate were both investigated. It was found that cooling by a spray tube could be effective and have satisfactory distribution over the test panel surface.

SECTION III

TEST SET-UP

The test equipment development and working description will describe the 20-foot solar petal. The same control arrangement was used on the 28 inch collector. The solar collector petal was tested in an aluminum enclosure (Figure 2) to contain the nitrogen coolant and also to protect bystanders from the heat lamp brilliance. One of the test requirements was to simulate a zero "G" condition. This was accomplished by calculating the weight per section of the petal and relieving this weight by a beam-pendulum arrangement as shown in Figure 2.

Because of the very thin skin (approximately .025 inches), and the rapid heat transfer the test was set-up whereby all heating would be done on the front face and all cooling from the back face. A baffle plate was placed alongside the specimen in the test enclosure to reduce the billowing action of the coolant. All data connections were made as shown in Figure 6. Data were fed to the Structures Test Branch High Speed Data Acquisition and Processing System.

The program signal for the heating and cooling was generated by a Research, Incorporated Data-Trak analog programmer. This sends a voltage level corresponding to the temperature desired to the Research, Inc. 4080 Recorder-Controller. The 4080 then compares the program signal level to the specimen feedback temperature (thermocouple output) to see if they are equal. (Null position.) If not, the controller will adjust its output to correct the situation. For the heat side of the cycle the 4080 output, because of an "off null" position, causes the Research, Inc. Model 4079 thyatron power unit to raise (or lower) the voltage to the heat lamps. On the cooling portion of the cycle the 4080 output is amplified to a level necessary for control of the Conoflow servovalves which open or close the liquid nitrogen valve as required.

On the 28-inch Viron solar collector, because of the light weight of the structure, the zero "G" suspension was not used; instead a three-point suspension was used which allowed it to deflect under thermal stresses (see Figure 12).

SECTION IV

TEST CONDITIONS

The tests run on each of the collectors were three real-time cycles of 90 minutes each, and 48 rapid cycles of nine minutes each. The first real-time cycle varied from room temperature to +125°F, down to -50°F, then returning to room temperature. The

second and third real-time cycles followed the same outline with temperature limits of +175° to -100°F, and +225° to -150°F, respectively. The rapid cycles all had as limits +225° to -150°F. Temperature profile followed is shown in Figure 7.

SECTION V

TEST RESULTS

On the 20-foot petal the deflection was the most critical measurement. The focus for the assembled parabolic reflector must be held to close tolerances; therefore, the deflections of one petal affects the total output greatly. The deflection measurements plotted versus temperature indicated the petal tended to straighten during the cooling cycle. Representative data plotted from these tests are presented in Figures 8 through 10. Complete data compiled during these tests are not presented in this report because it is voluminous and in tabular form. However, it will be retained on file at the Structures Test Branch (FDTT), Wright-Patterson Air Force Base, Ohio.

The petal was examined after each series of runs for cracks at weld joints, and buckles or distortions from the thermal loading. No evidence of failure was observed. In Figure 1, showing the original petal condition, the

manufacturing flaws can be seen. As this was a prototype model, the assumption can be made that future petals would have a better finish and even better structural integrity.

On the Viron 28 inch solar collector, deflection was also the main data requirement. Figure 12 shows the test set-up used. The structure was also observed after each run to determine if the thermal cycling would loosen the aluminized mylar from the front face. No defects were found at any time. Representative data from these tests are shown in Figures 14 through 15.

The tests as run were aimed at thermal simulation only. The data would, of course, be more valid if a vacuum chamber were used and a cold wall were used for cooling. This would apply only to the real-time cycles, as the rapid cycles could not be run in a vacuum.

SECTION VI

CONCLUSIONS

The two solar collectors tested represented two different design concepts to be used for space power systems. The 20-foot petal design is an unfurlable structure, whereas the 28-inch Viron is of the expandable structure design concept. Both collectors

remained structurally sound during the thermal cycling. These tests have proven the manufacturing methods to be sound, but some improvements have to be made to get the optical reflectivity and parabolic accuracy desired.

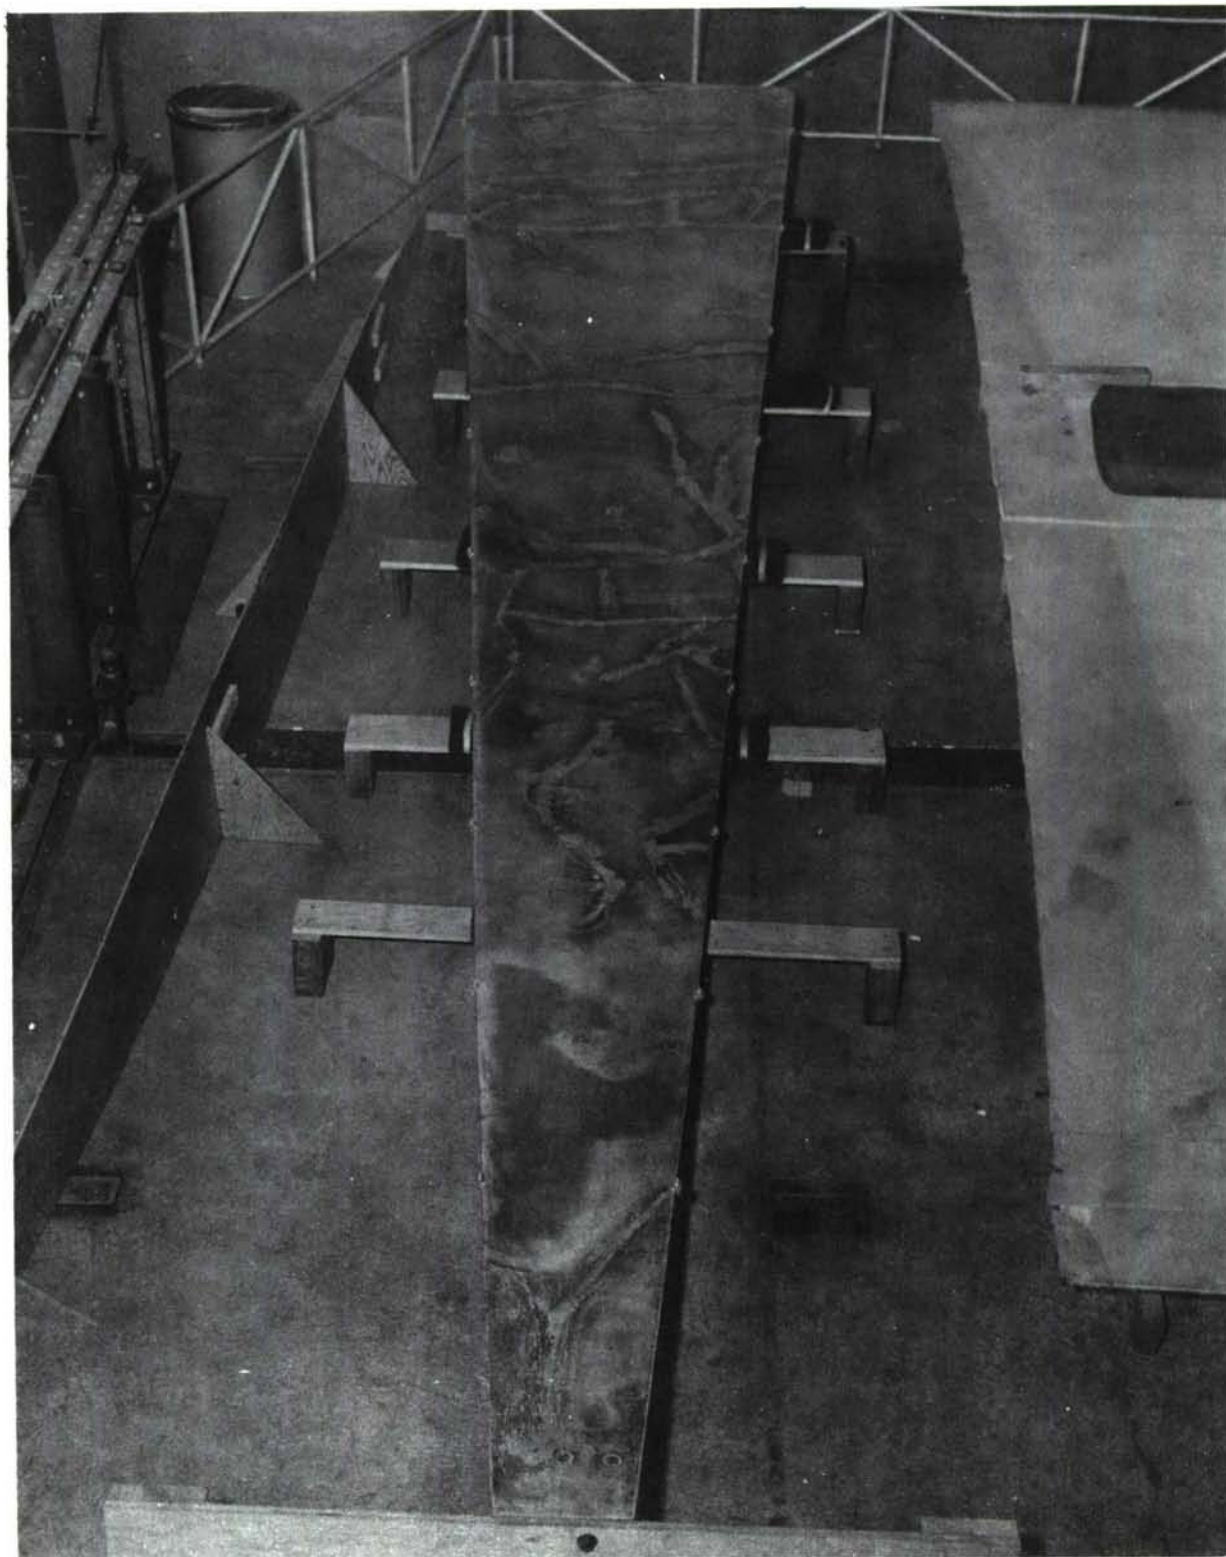


Figure 1. 20-Foot Solar Petal as Received

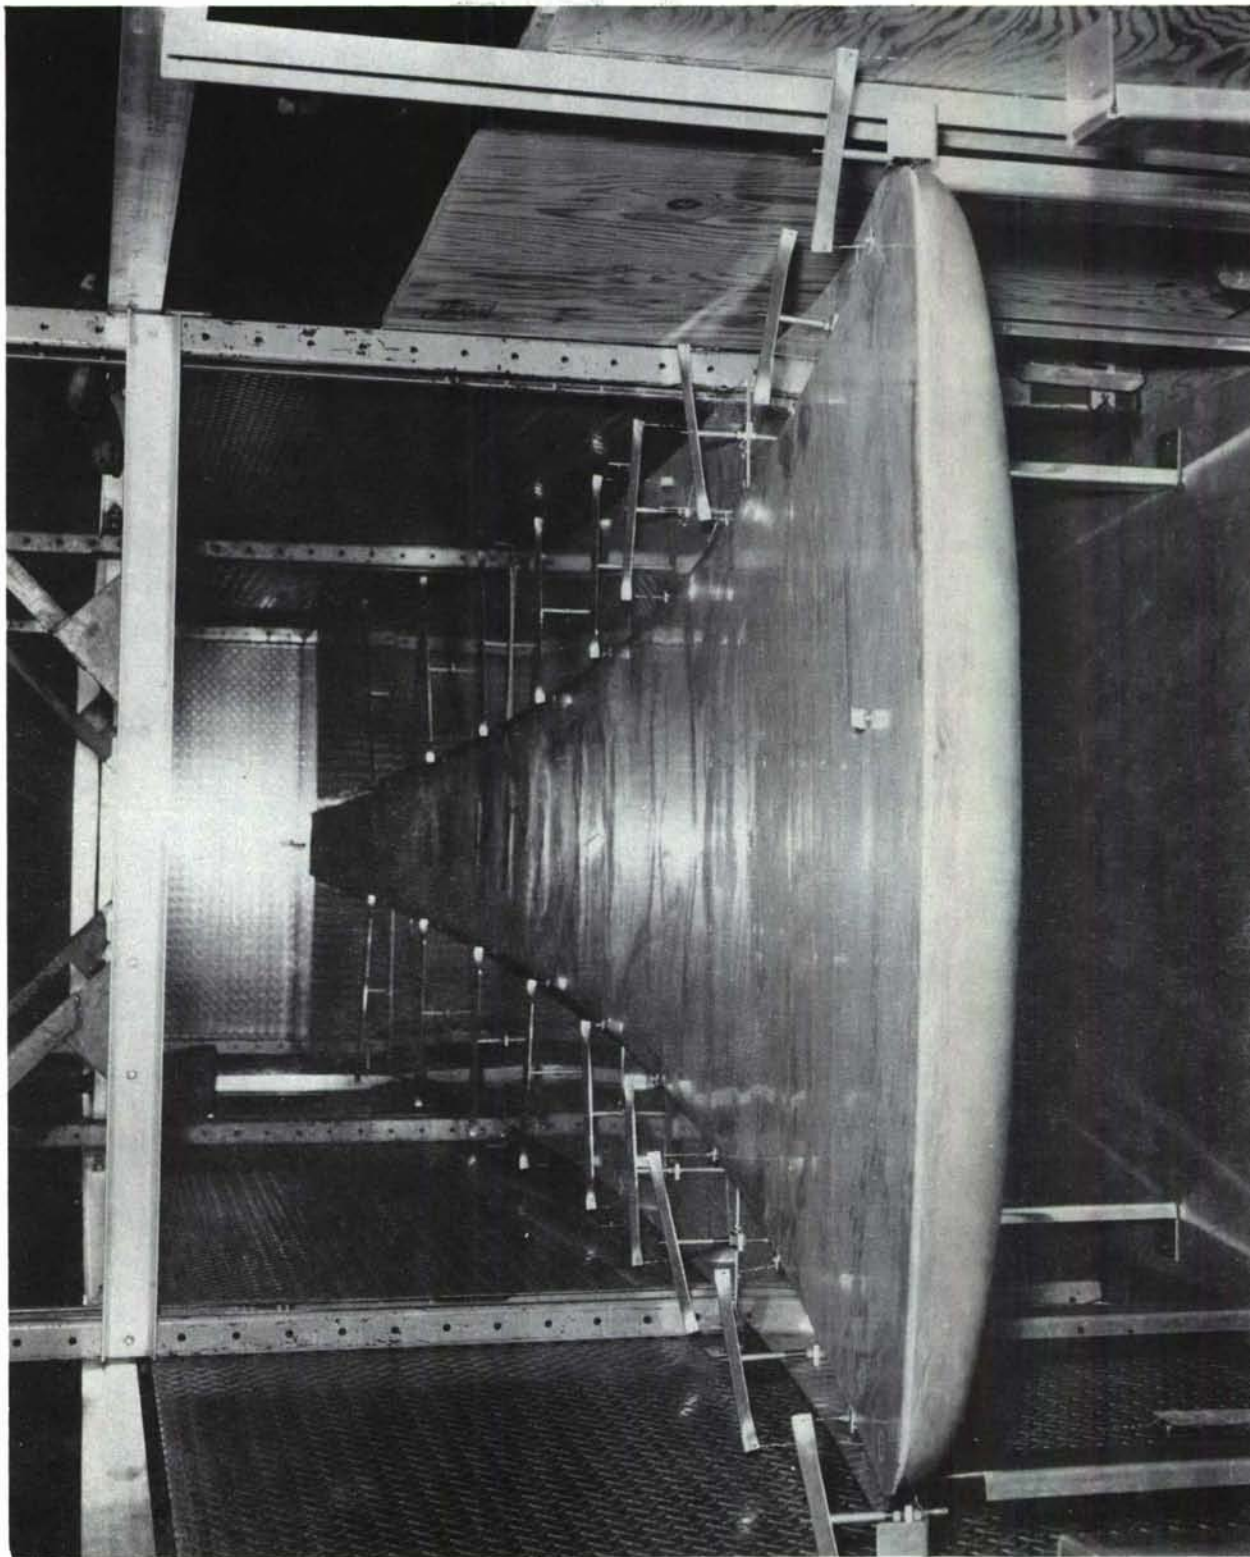


Figure 2. 20-Foot Solar Petal Mounted in Aluminum Enclosure

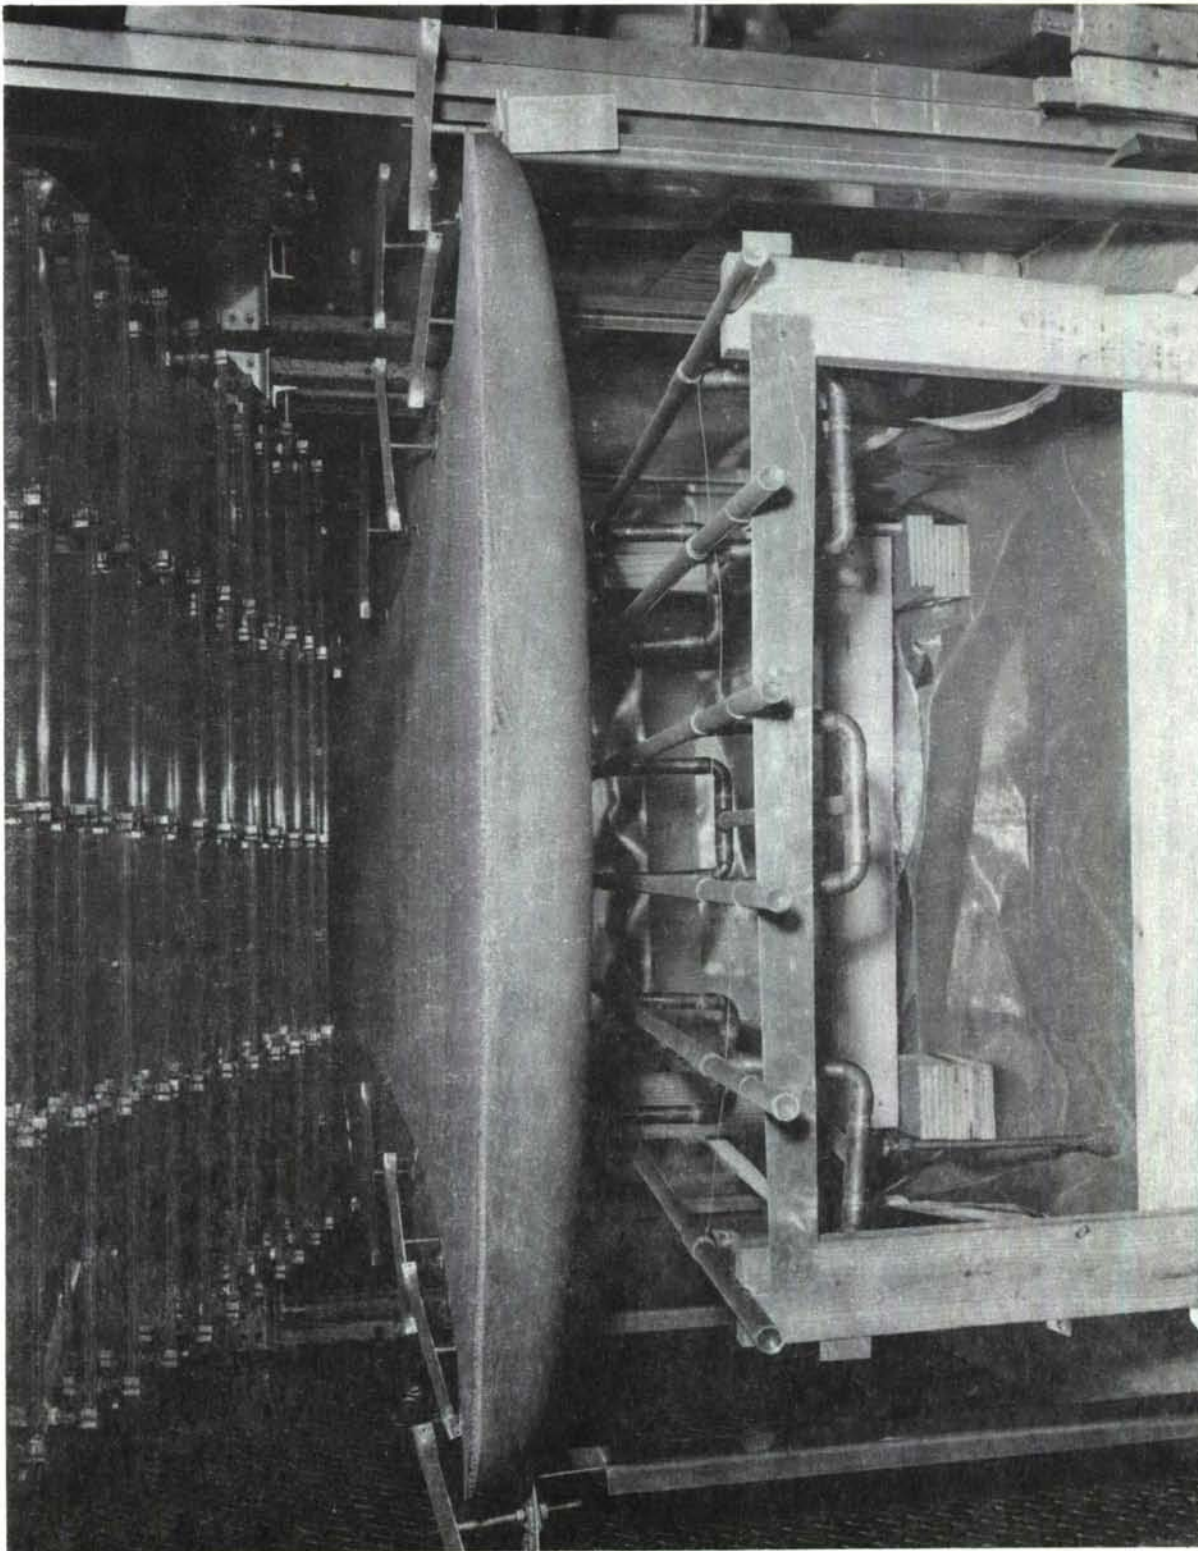


Figure 3. 20-Foot Solar Petal Showing Heat Lamps, Spray Cooling Tubes and Dead Weight Supports

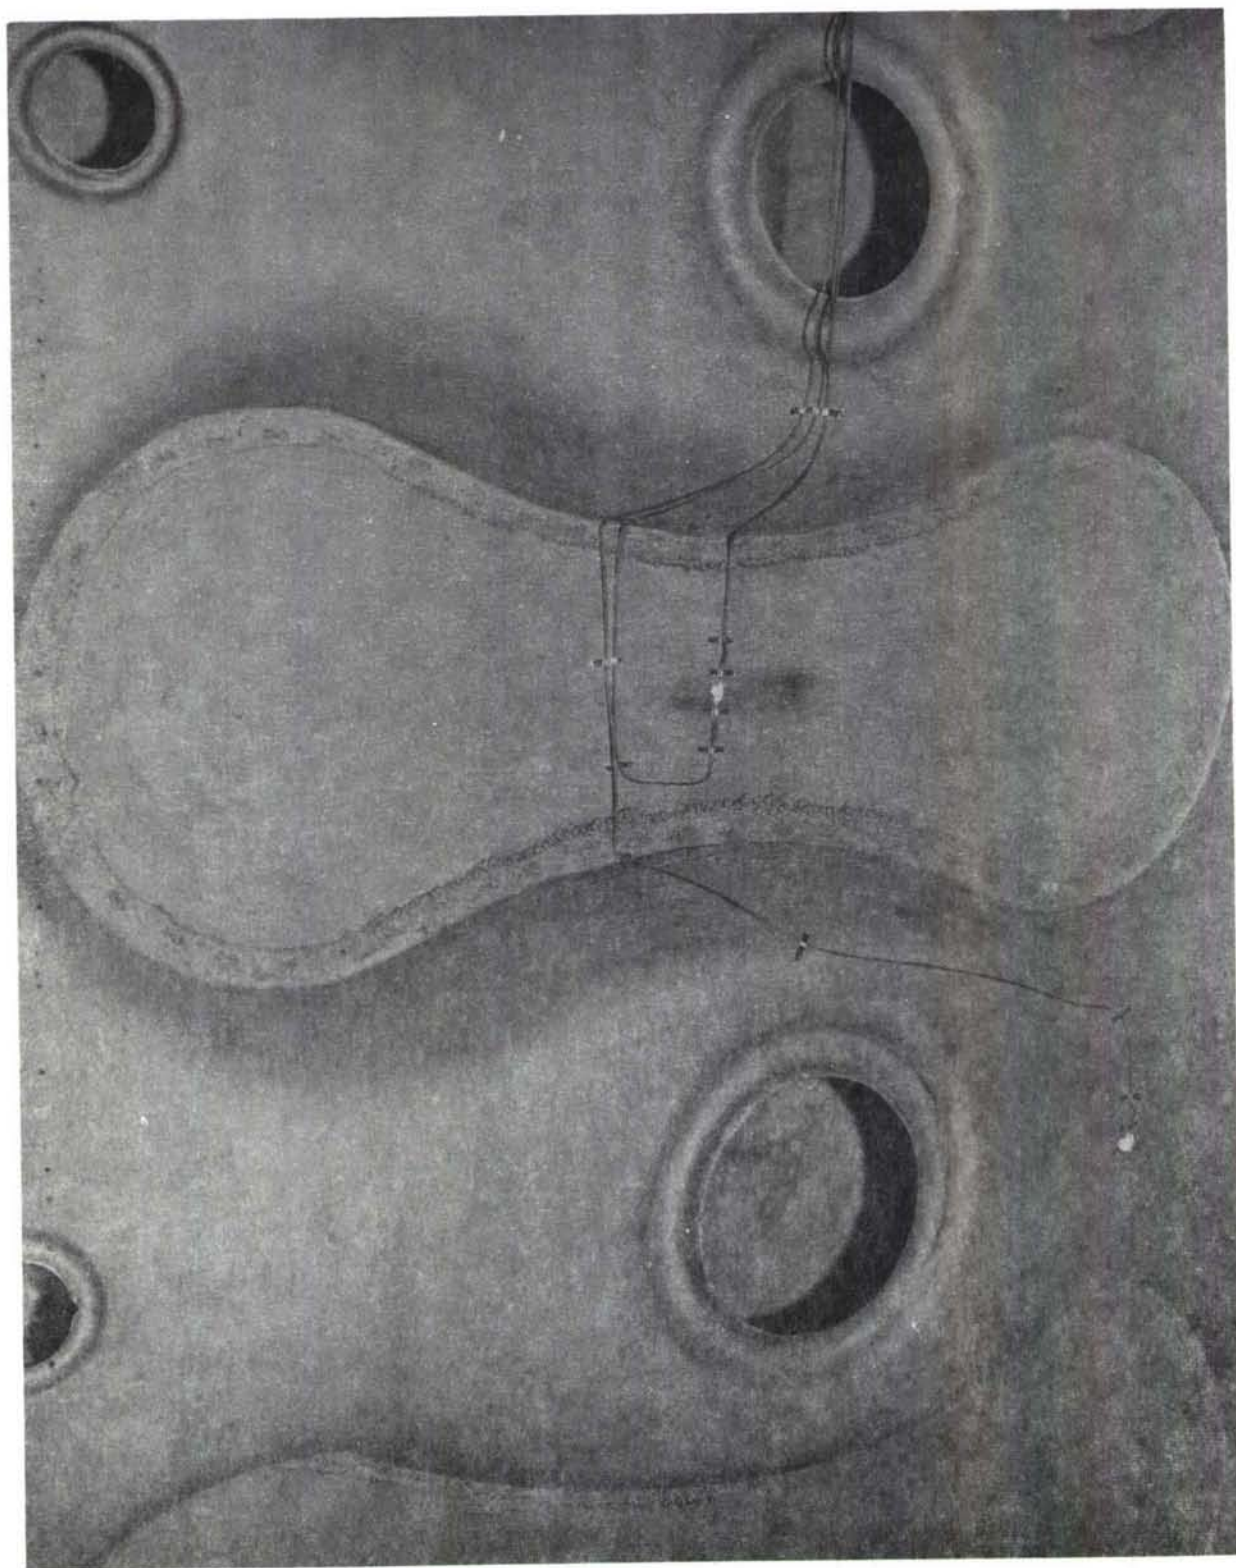


Figure 4. Close-up of Back Face of 20-Foot Solar Petal Showing Typical Thermocouple Mounting

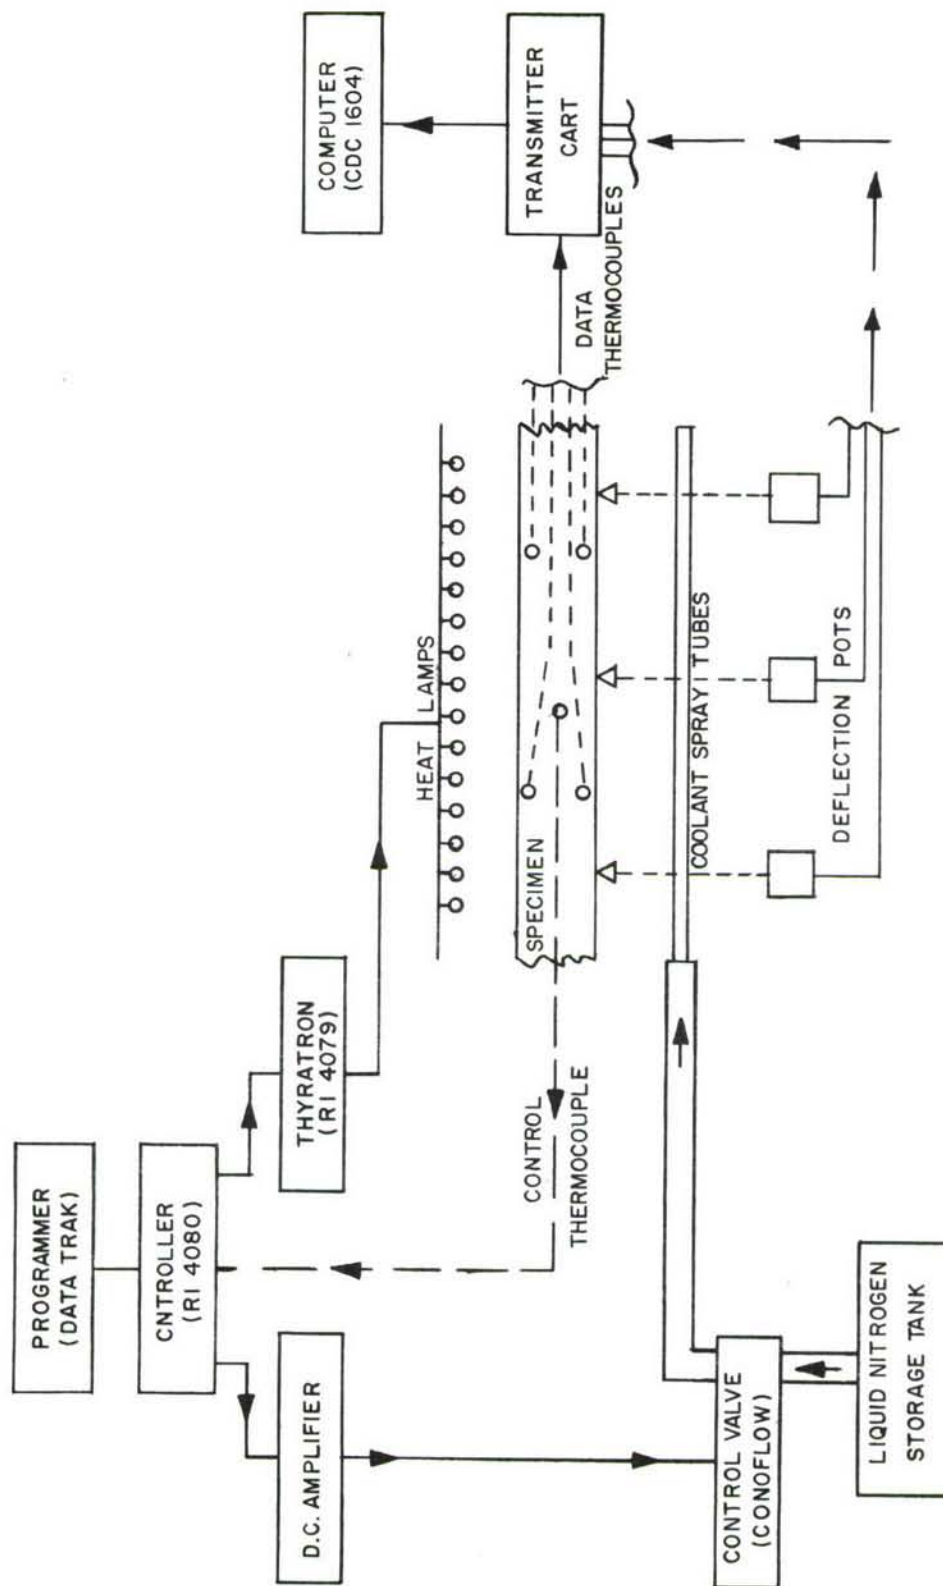


Figure 5. Control and Data Block Diagram

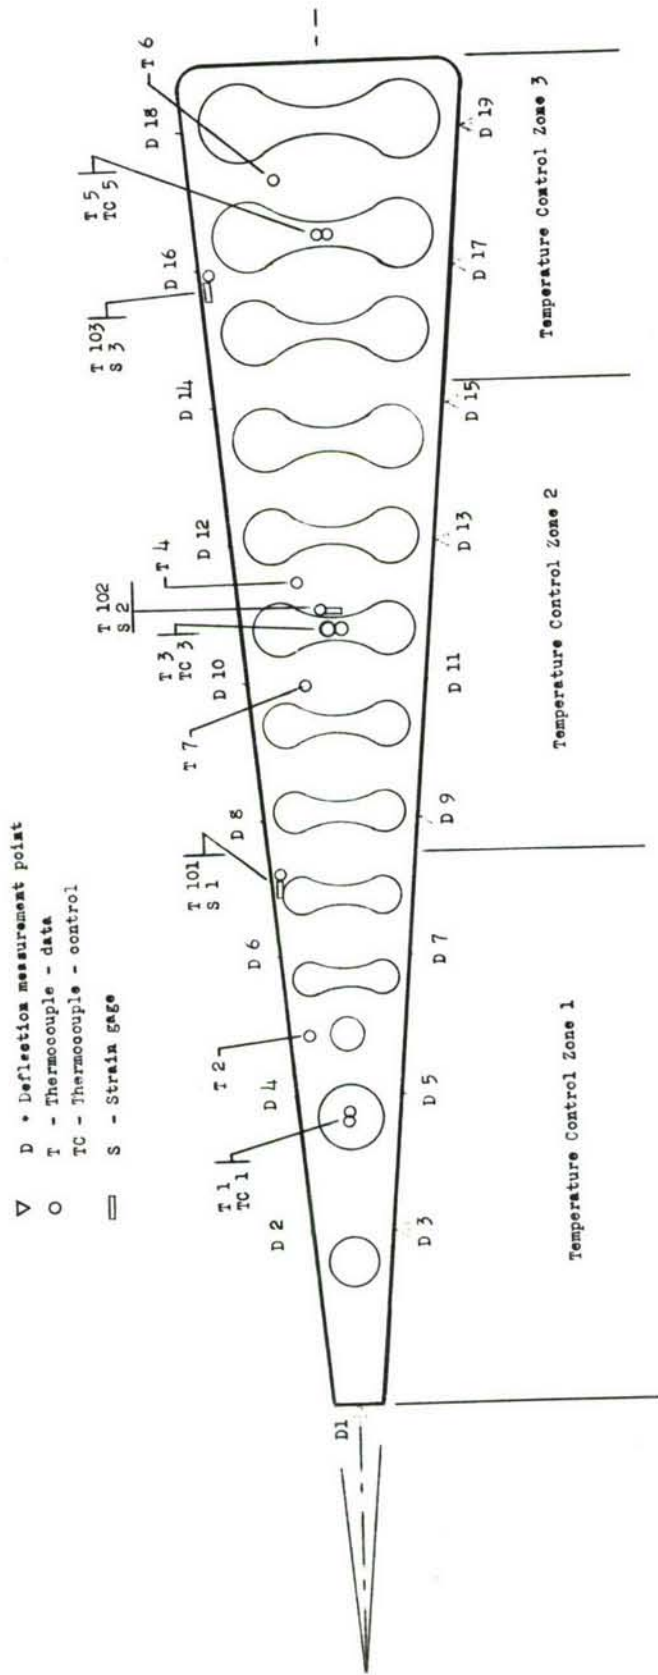


Figure 6. 20-Foot Solar Collector Petal Instrumentation Locations All Test Conditions

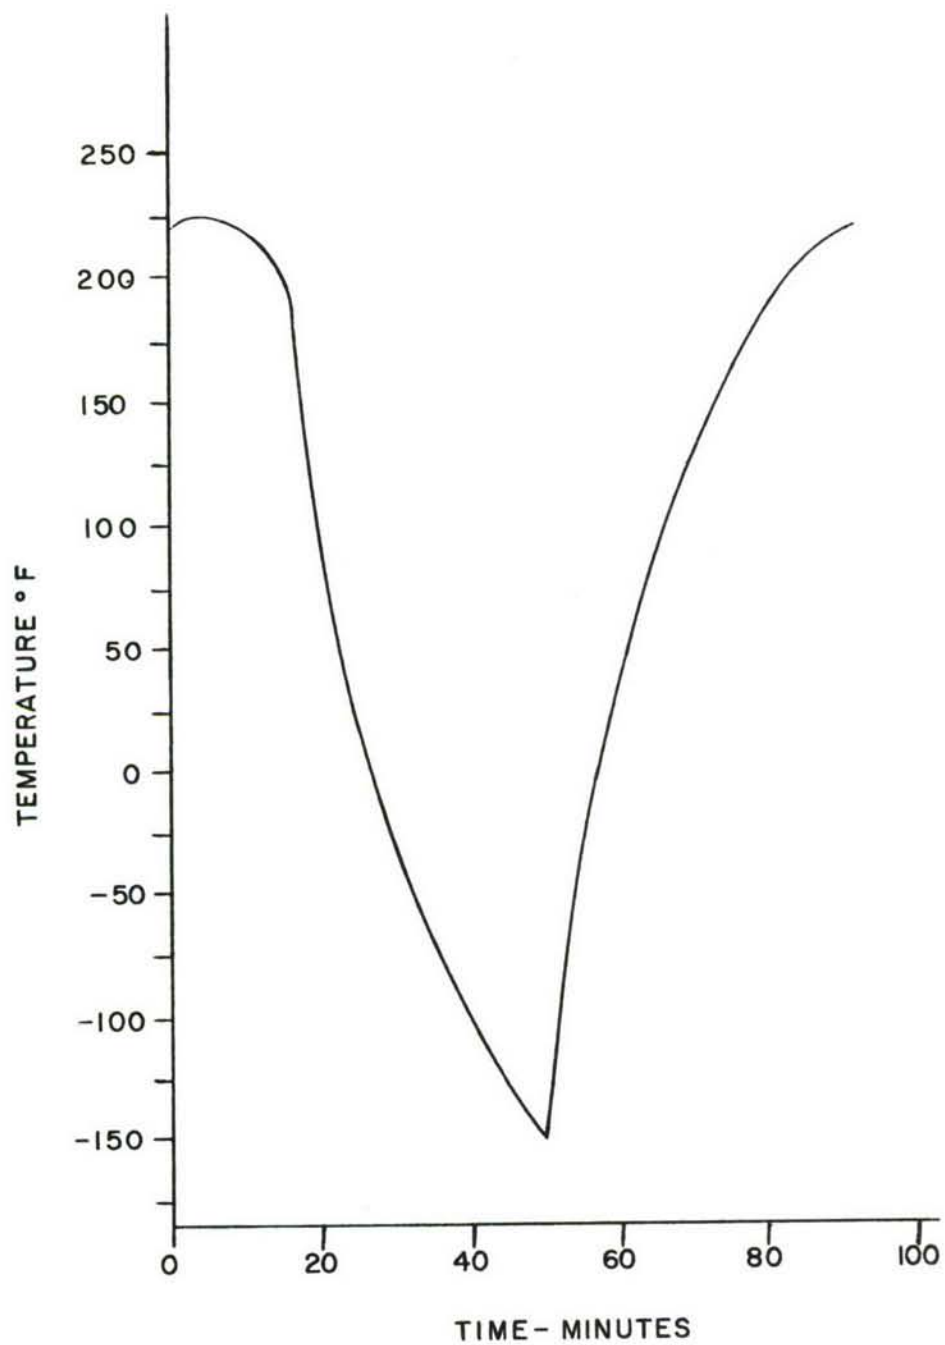


Figure 7. Time-Temperature Profile Adapted to Solar Collector Tests

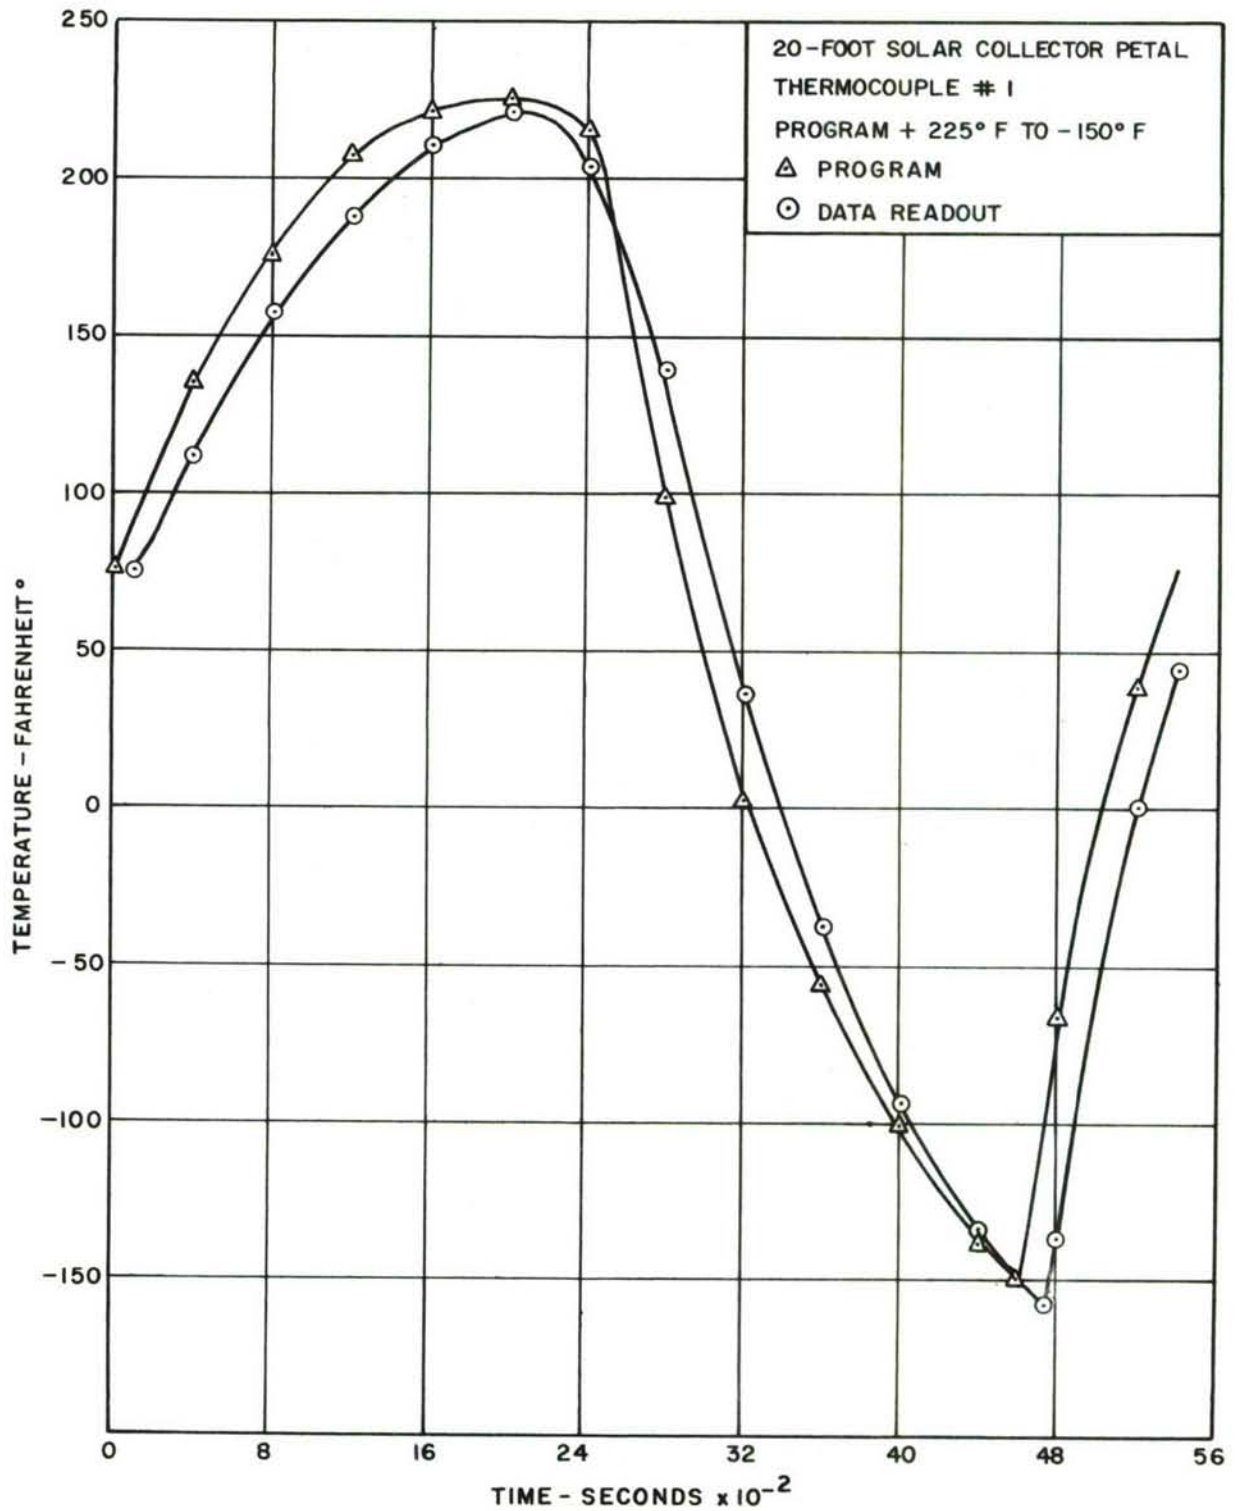


Figure 8. Program Temperature versus Data Readout Temperature During 90-Minute Program

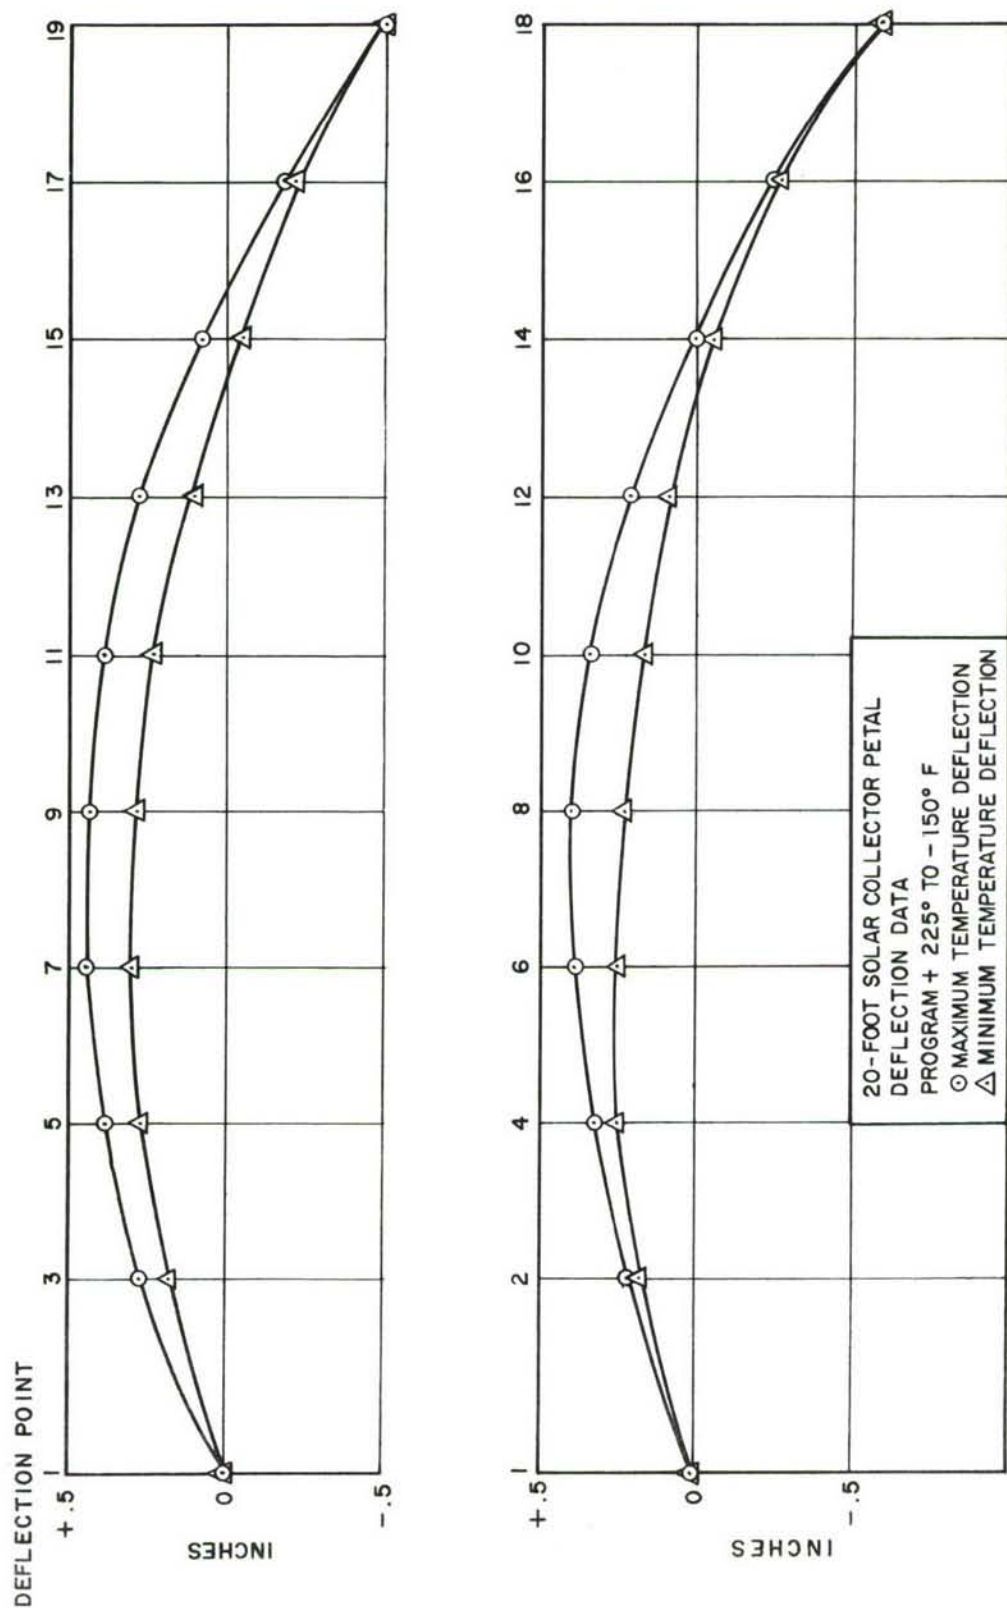


Figure 9. Deflection Changes from Maximum Temperature to Minimum Temperature

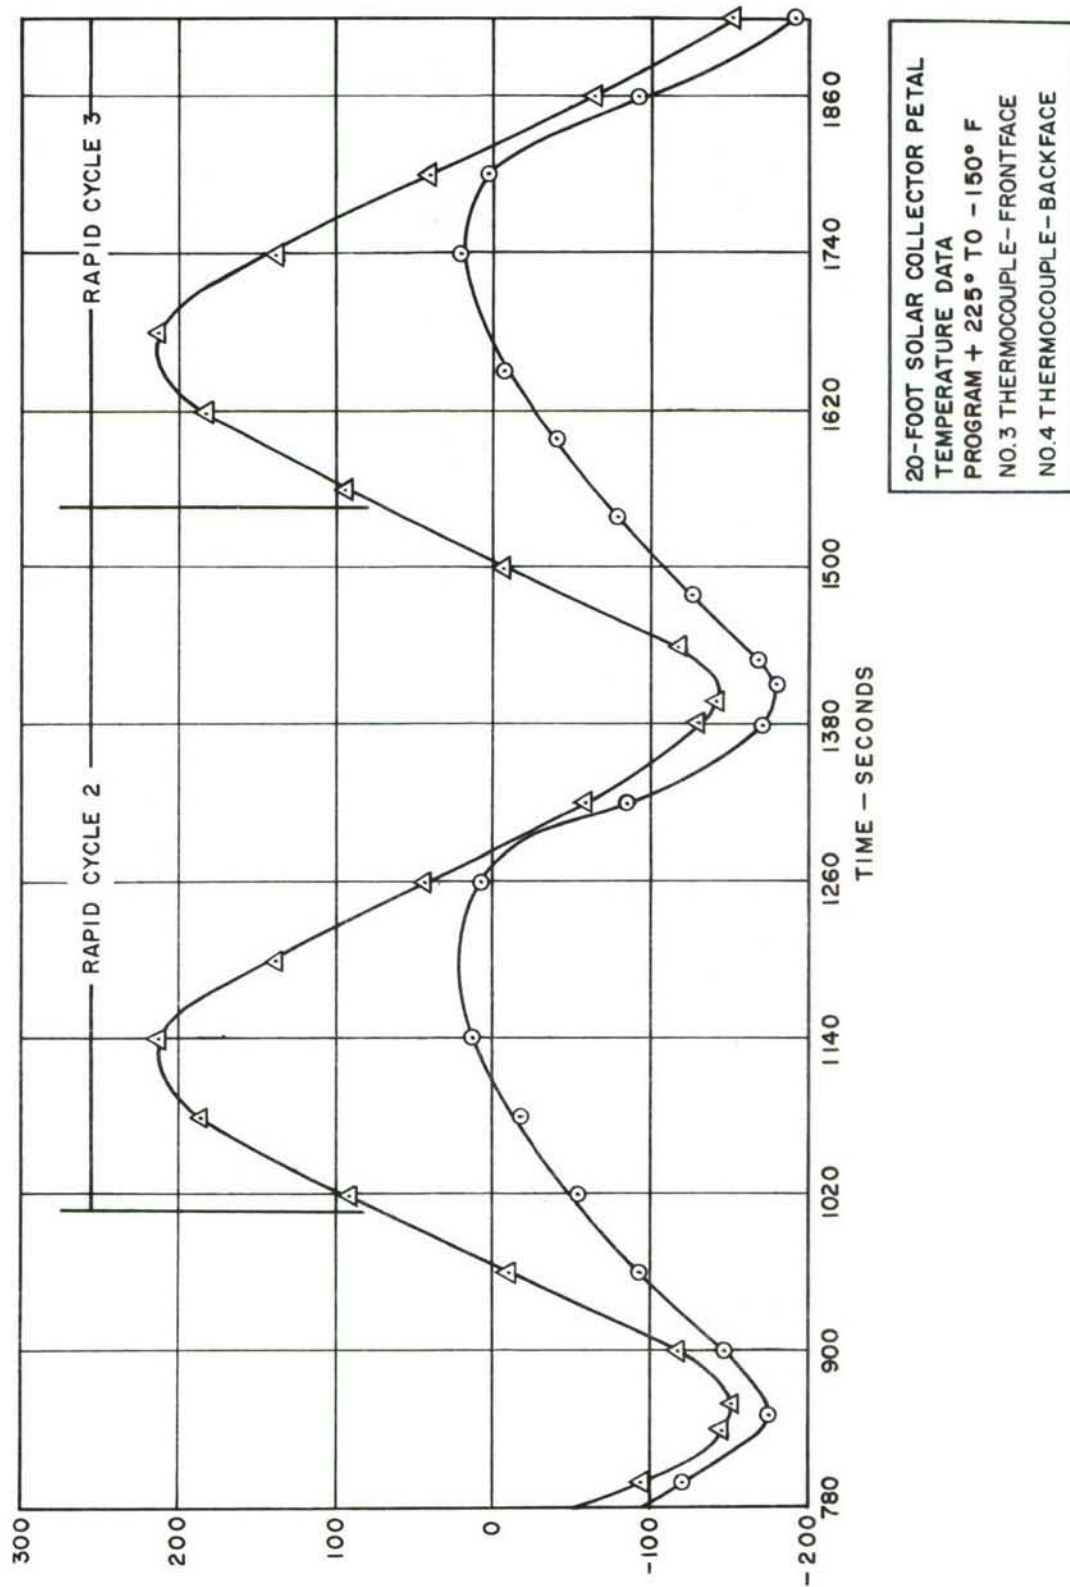


Figure 10. Thermocouple Plots Showing Temperature and Response Lag on Rapid Cycles

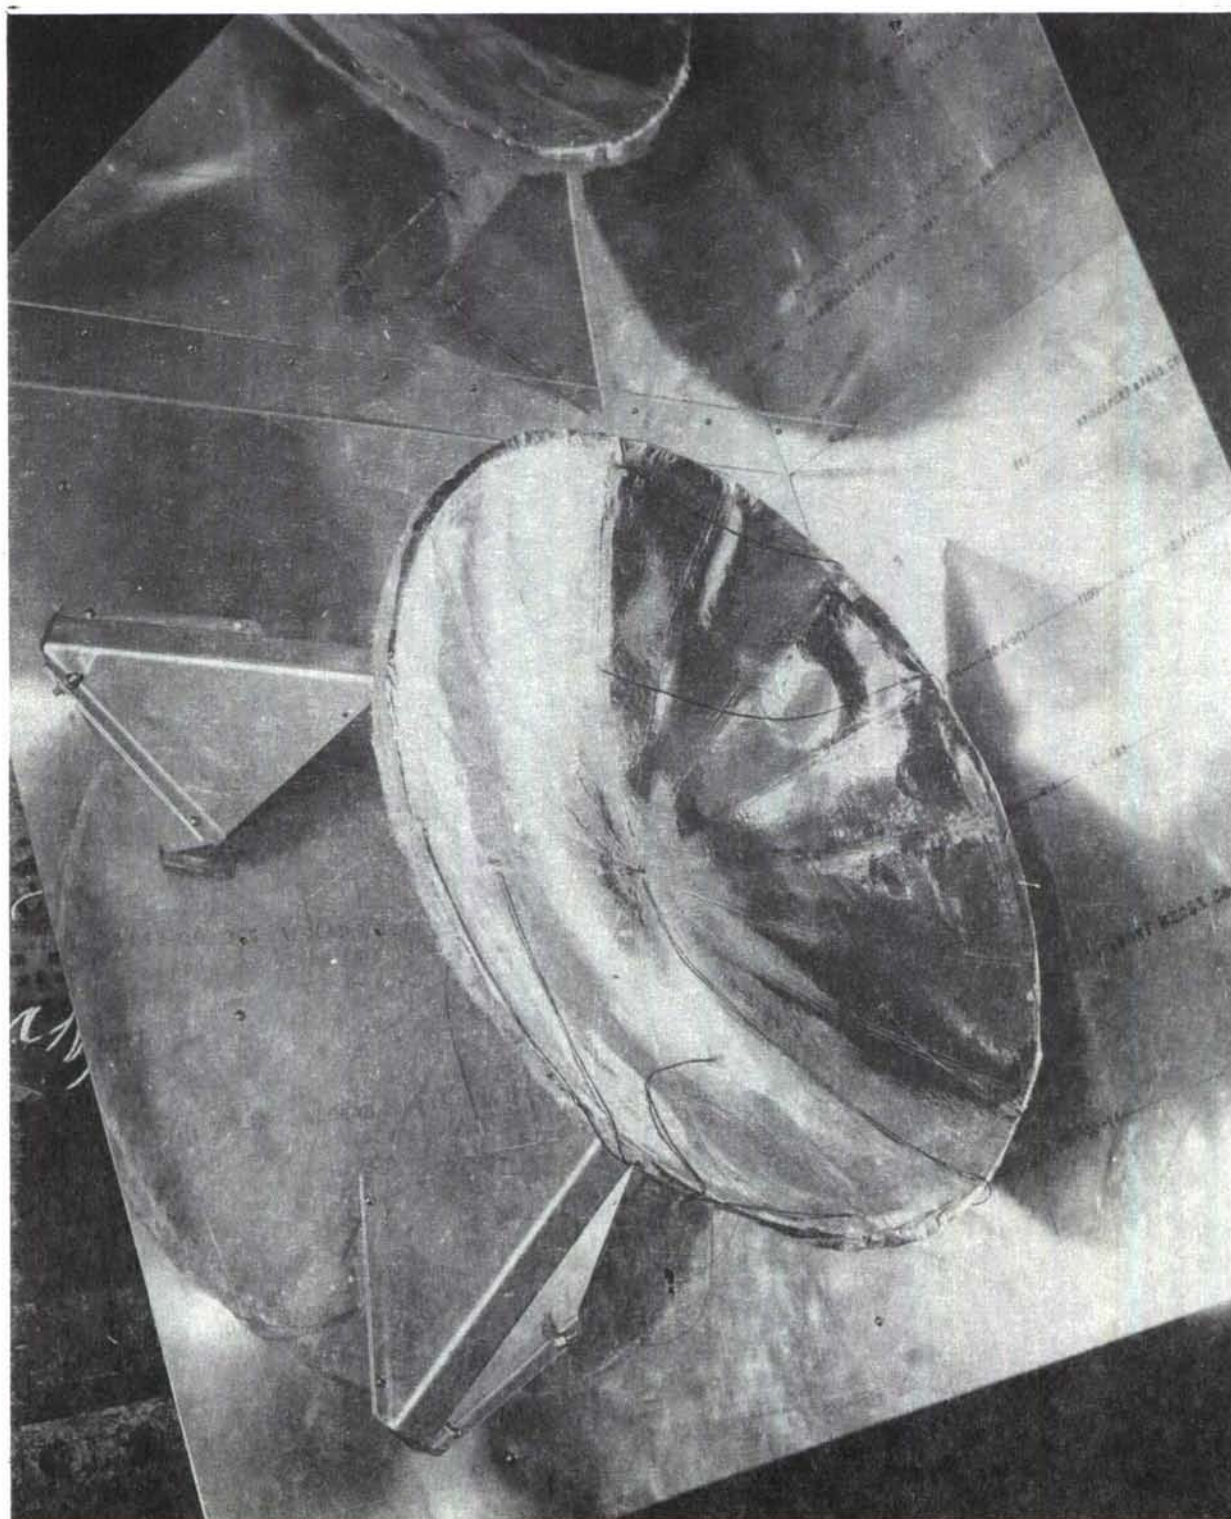


Figure 11. 28-inch Viron Solar Collector Mounted in Test Enclosure

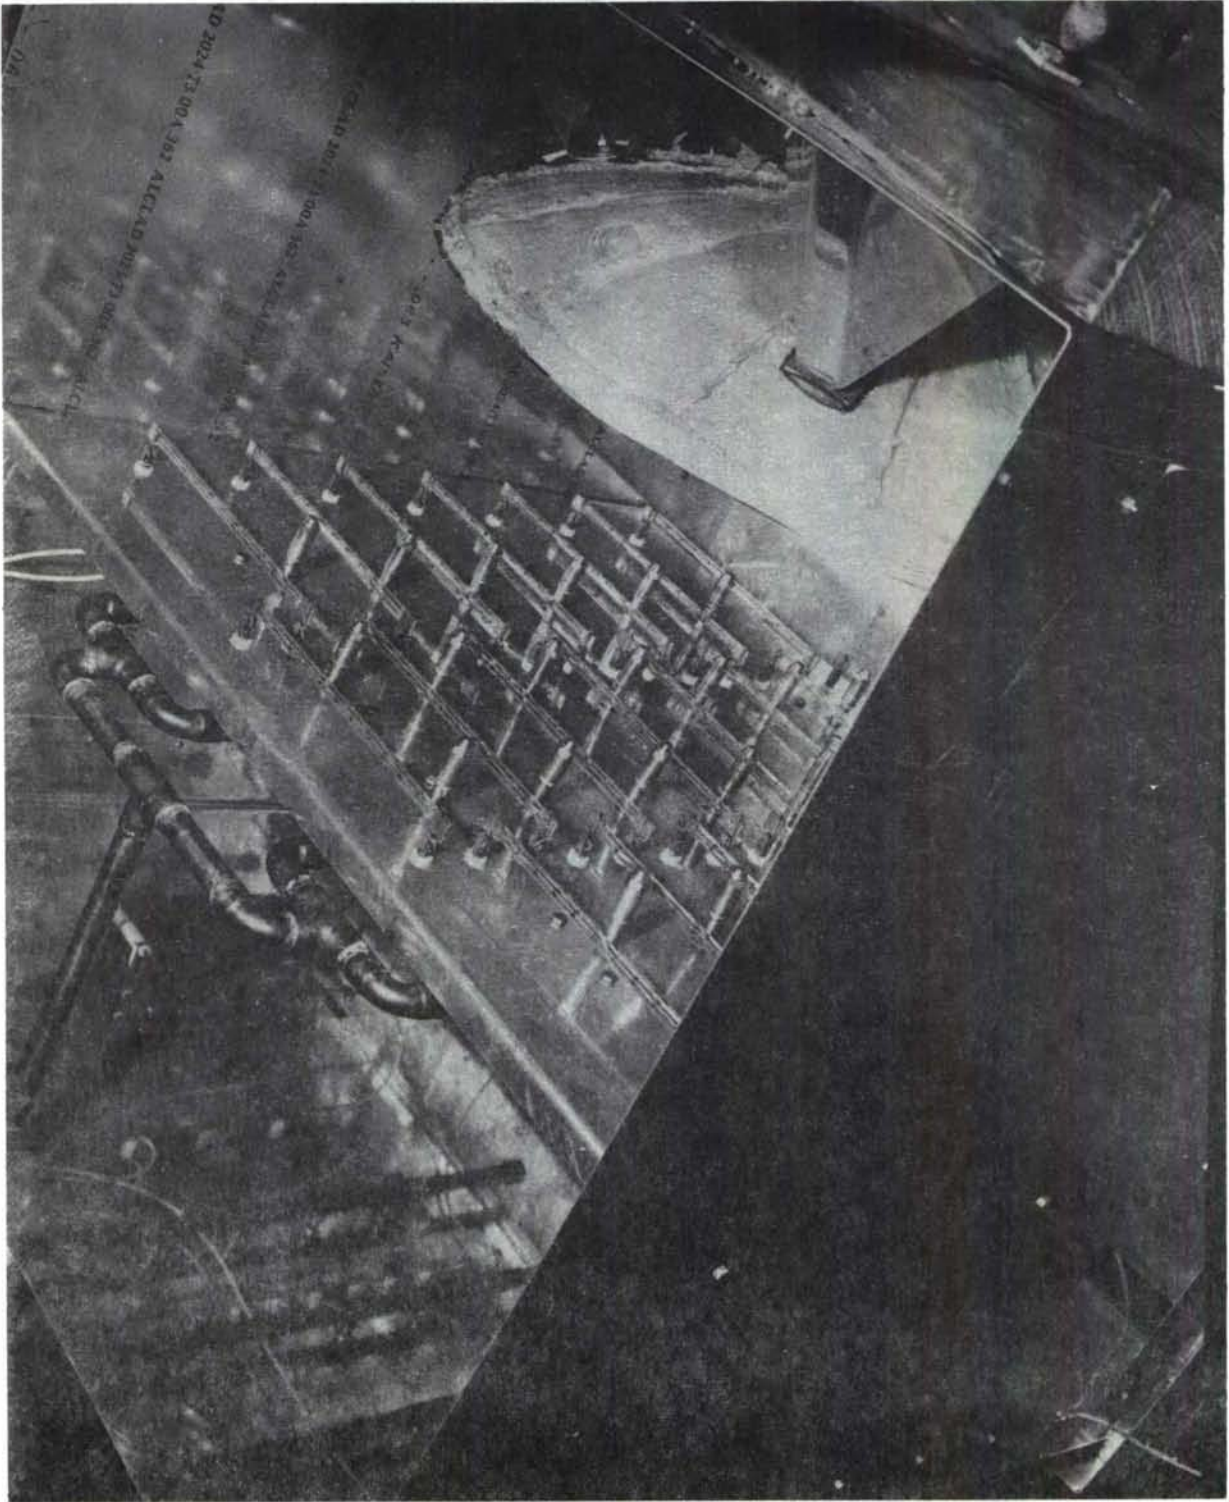


Figure 12. 28-inch Viron Solar Collector with Heat Lamps and Spray Cooling
Nozzles Mounted


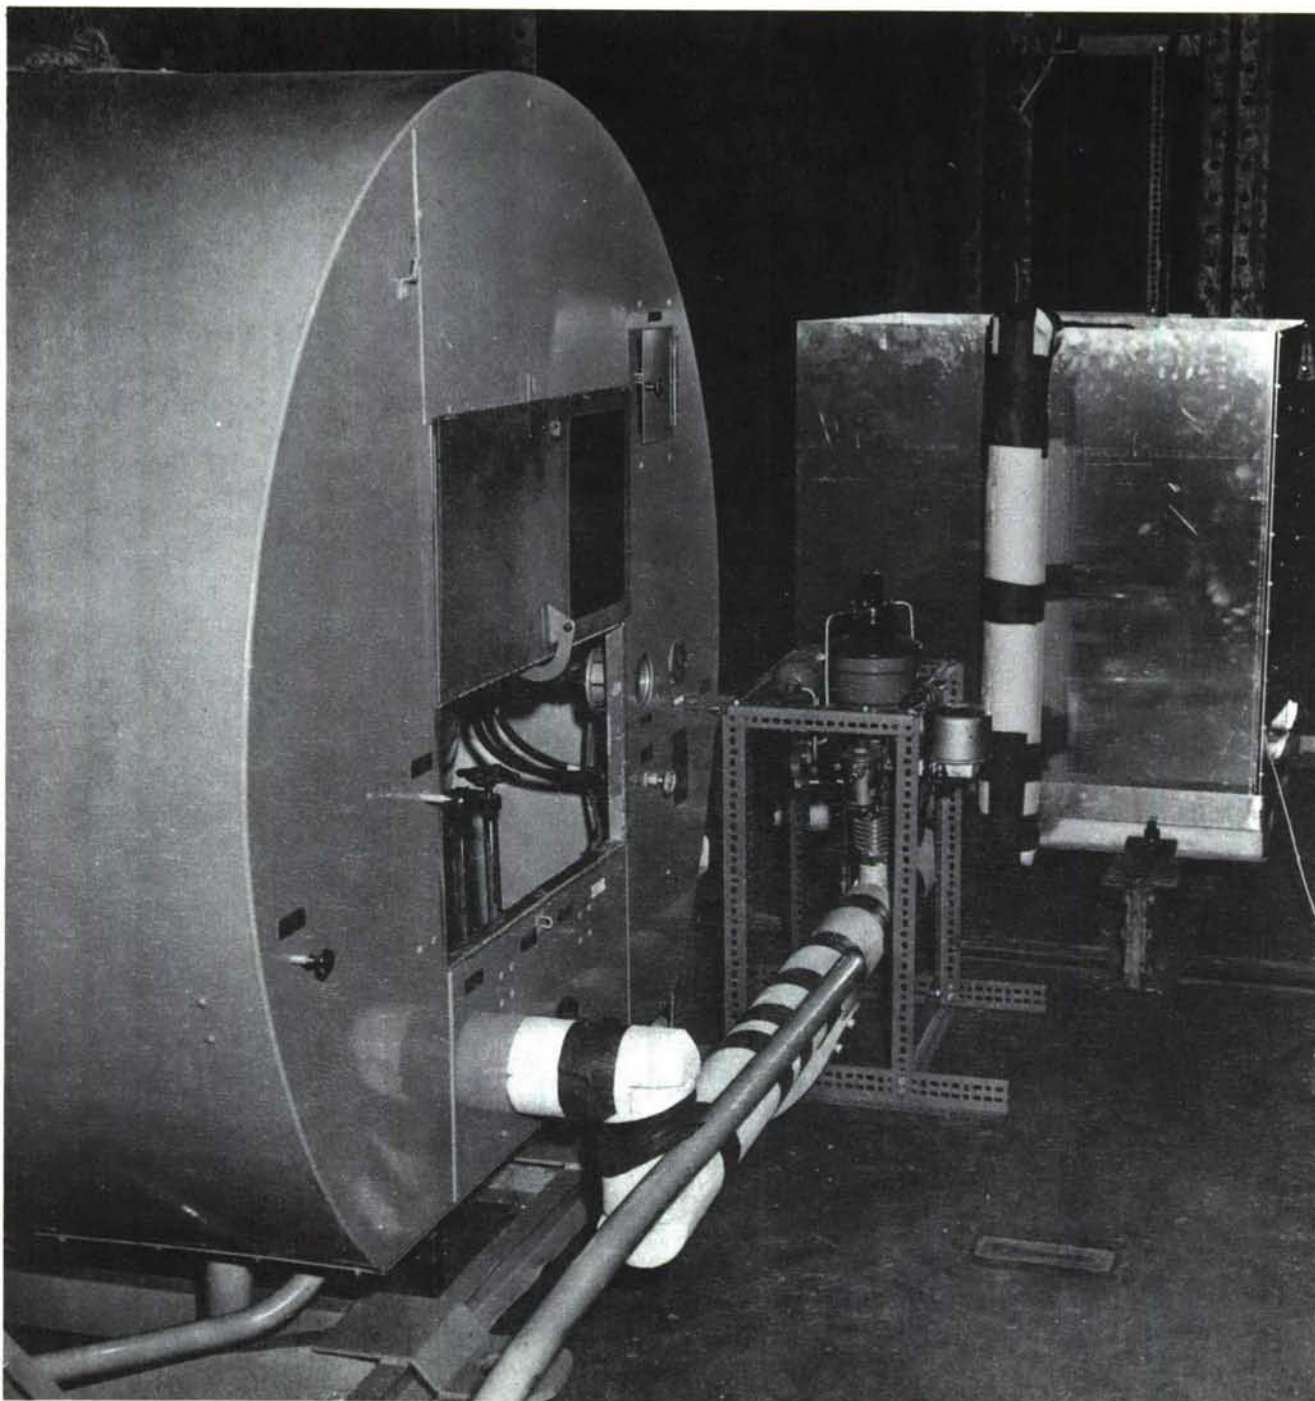


Figure 13. 28-inch Viron Test Set-up Showing Liquid Nitrogen DeWar and Conoflow Control Valve

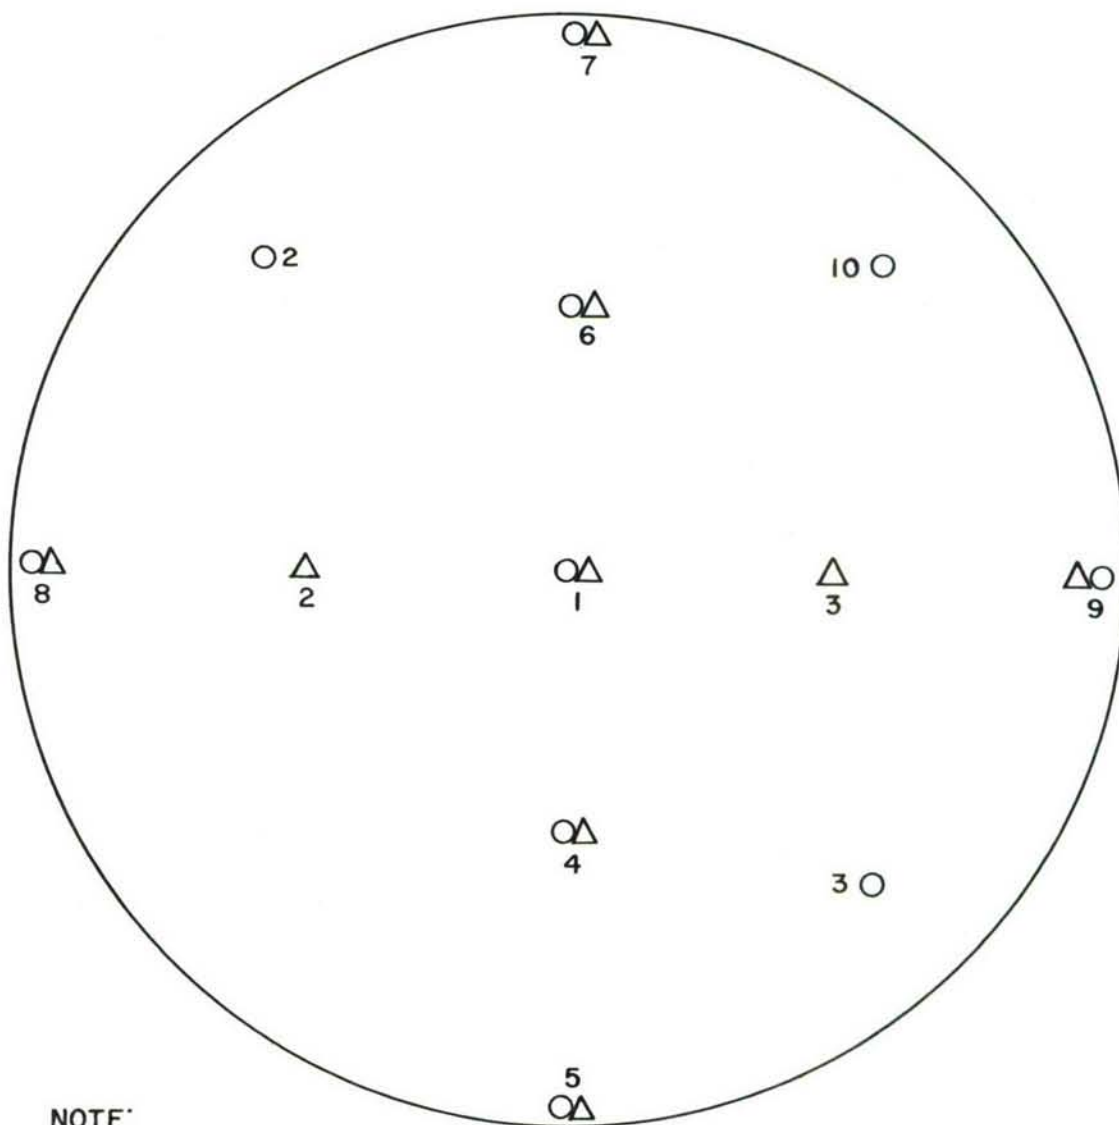

NOTE:

1. Concave surface. View is into the reflective surface.
2. Δ Thermocouple locations
3. \circ Deflection transducer locations
3. \circ 2, 3, and 10 are on the aluminum mounting brackets
4. Thermocouple wire is 36 gauge Iron - Constantan ISA - J

Figure 14. 28-inch Viron Solar Collector Instrumentation Locations

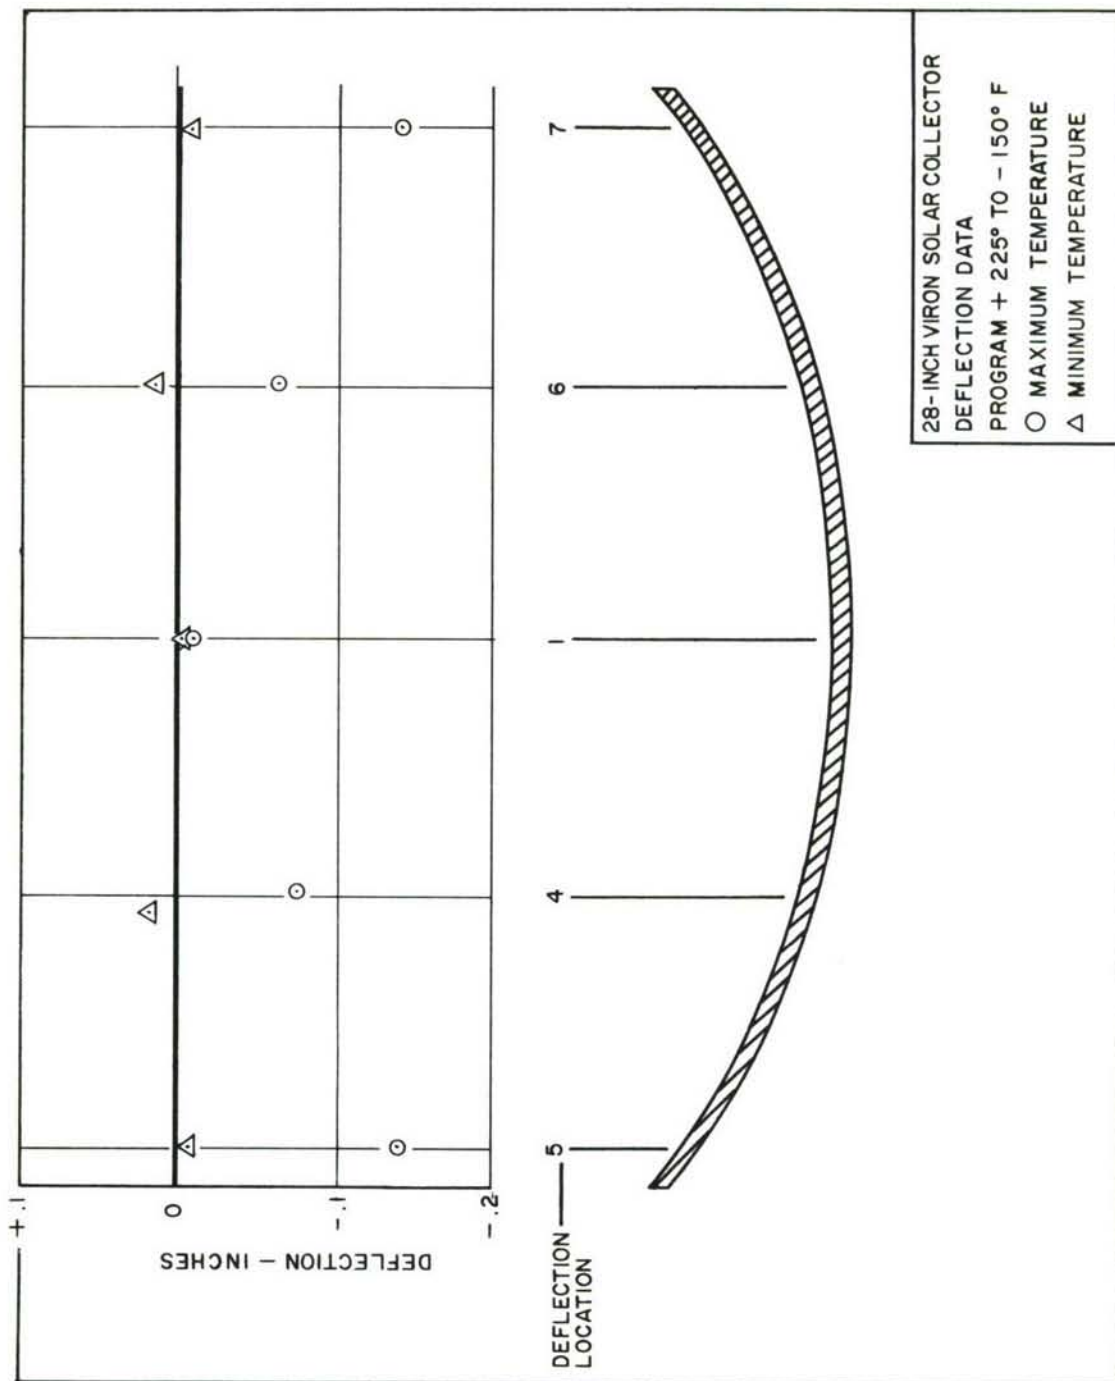


Figure 15. Deflection Changes Between Maximum and Minimum Temperatures

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) Structures Test Branch Structures Division AF Flight Dynamics Laboratory		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED
		2b. GROUP
3. REPORT TITLE THERMAL TESTING OF EXPANDABLE SOLAR COLLECTORS		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Final		
5. AUTHOR(S) (Last name, first name, initial) GUNDERSON, ALLAN, W.		
6. REPORT DATE December 1966	7a. TOTAL NO. OF PAGES 24	7b. NO. OF REFS
8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S) AFFDL-TR-66-132	
b. PROJECT NO. 8170		
c. Task No. 817004	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY Air Force Flight Dynamics Laboratory	
13. ABSTRACT The Solar Collector Test Program was initiated to determine the structural response of expandable and unfurlable solar collectors to a simulated space thermal environment. The heating of the collectors was by T-3 infrared heat lamps, and cooling was obtained by liquid nitrogen boil-off. The collector structures in both instances performed as expected and no unusual deflections were measured.		

UNCLASSIFIED
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Expandable Structures						
Thermal Testing						
Solar Collectors						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.